


SeaRox® MA 7000 ALU

SeaRox MA 7000 ALU is a soft, lightweight mat made of stone wool.
 SeaRox MA 7000 ALU is delivered as a highly compressed, compact roll.
 The product comes as standard with reinforced aluminium foil on one side.

Application

SeaRox MA 7000 ALU is used mainly for the thermal insulation of decks, bulkheads and outer bulkheads to maintain a comfortable indoor climate and comfort.

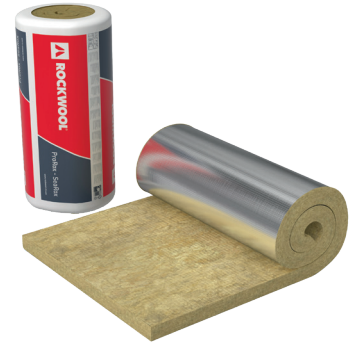

Product properties

Properties	Performance		Norm
Thermal conductivity	T (°C) λ (W/mK)	10 0,037	EN 12667
Nominal density	26 kg/m ³		EN 1602 / IMO
Compressive strength	-		EN 826
Fire classification	Non-combustible Low Flame-Spread Properties		Acc. IMO FTP code
Water absorption (short term)	< 1 kg/m ²		EN 1609 AC
Max. Application Temperature	Wool 250°C Facing 80°C		-
Sound absorption directly mounted	-		ISO 354 (approximated) Evaluated after ISO 11 654
Facings (as standard)	Reinforced aluminium foil		IMO A.653(16) (low flame - spread)

Dimensions

SeaRox MA 7000 ALU

Thickness (mm): 50, 100 Length (mm): 3000 Width (mm): 1000



0575

As ROCKWOOL has no control over insulation design and workmanship, accessory materials or applications conditions, ROCKWOOL does not warranty the performance or result of any installation containing ROCKWOOL products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. ROCKWOOL Technical Insulation reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.

ROCKWOOL® Technical Insulation, ROCKWOOL®, SeaRox® and ProRox® are registered trademarks of ROCKWOOL International A/S and cannot be used without a prior written consent.